




MBRP Muffler Installation Instructions

2150307/2160207

03-06 F6/F7 Firecat/F5 Firecat

1. Remove springs fastening stock muffler to frame and exhaust pipe. (Set springs safely aside so they can be reused) Remove stock muffler.
2. Install MBRP muffler, placing its outlet through the stock exit in the belly pan.
3. Re-install muffler to pipe springs.
4. Remove the chain case nut and install the provided angle bracket, fasten bracket with nut. Install stock spring from angle bracket to top of muffler.
5. Use the stainless spring extension to fasten the MBRP muffler to the stock mounting location at the front of the sled. (use most forward bracket on MBRP muffler)
6. Apply the supplied heat tape to the belly pan where muffler is closest for added heat protection.

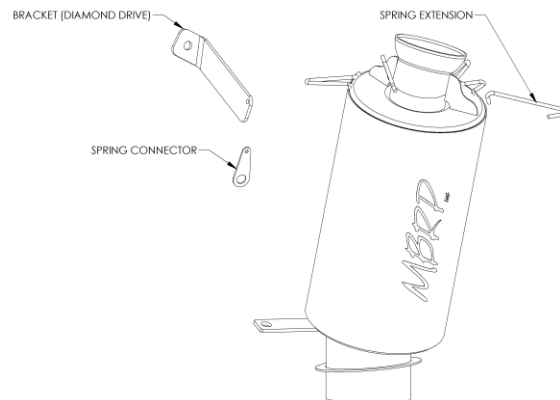

FOR DIAMOND DRIVE: After silencer is installed, attach the diamond drive bracket provided (facing upwards) to the frame in front of the coolant tank (second bolt hole). Attach stock spring to end of the diamond drive bracket using small hole and to spring hook on silencer to hold it in place. Slight bending of bracket may be required to properly affix spring.

NOTE: To avoid exhaust leaks use high heat silicone to seal all connections between expansion chambers and muffler. Monitor for leaks during the first 200 miles after your installation and re-apply silicone where necessary. We suggest having your local snowmobile mechanic or performance shop install this product.

CAUTION: DO NOT touch muffler while snowmobile is running or shortly after it has run, as it may result in personal injury.

MBRP Inc warranty applies for a one (1) year period from the date of purchase to defects in product material and workmanship and is to the original purchaser on record and for the original vehicle for which it was designed and installed. This warranty is limited, at MBRP Inc.'s sole determination, to the repair or replacement of defective product only and does not include the cost of removal or re-installation, damage by accident, abuse, misuse or misapplication or any consequential damages however they may arise. Determination of warranty coverage shall be at the discretion of an authorized MBRP Inc quality engineer.